

MATERIALS/ DIMENSIONS


VERSION 1

Pos.	Pcs.	Description
1	1	Filter head
2	1	Lower housing bowl
3	2	Wall bracket (option)
4	1	Differential pressure indicator
5 Type 0035- Type 0750	1	Internal automatic float drain
6 Type 1100	1	External automatic float drain

Materials filter housing	
Filter housing	Aluminium die cast
Differential pressure indicator	Polymer
Float drain	Polymer / aluminium mold cast
Sealings	Viton

Classification acc. to 97 / 23 / EC for fluids group 2	
Type 0035 - Type 0320	Art. 3, par. 3
Type 0450 - Type 1100	Cat. 1

Max. operating pressure	16 bar
Test pressure	22,9 bar
Perm. operating temperature	+1°C / +65°C

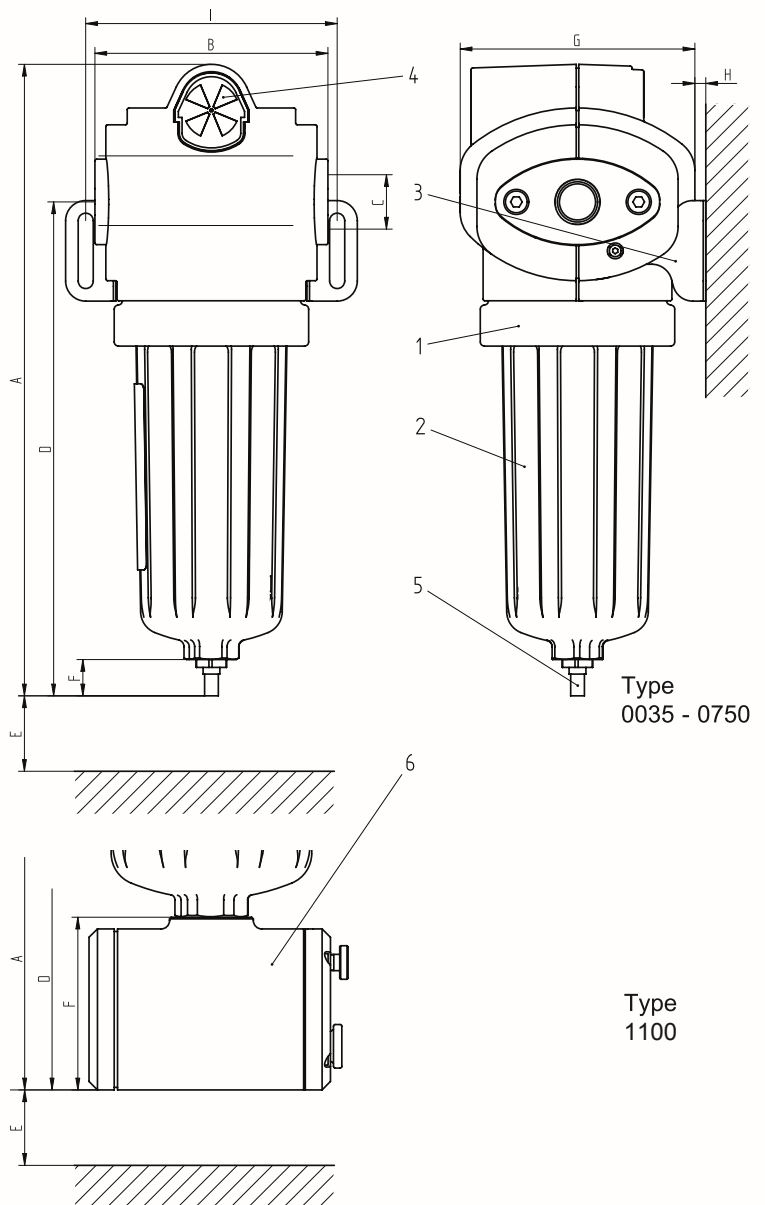

Size housing/ element	Flow rate* m ³ /h	Volume (l)	Weight** (kg)	A mm	B mm	C	D mm	E mm	F mm	G mm	H min./ max. mm	I mm
0035	35	0,20	0,5	255	76	G 1/4	185	100	27	85	5	84
0070	70	0,40	0,9	297	103	G 3/8	222	115	27	107	5 / 34	107
0120	120	0,50	1,0	340	103	G 1/2	265	150	27	107	5 / 34	107
0210	210	1,15	2,0	382	139	G 3/4	300	180	27	140	5 / 53	150
0320	320	1,50	2,2	442	139	G 1	360	250	27	140	5 / 53	150
0450	450	5	5,2	585	190	G 1 1/4	487	250	27	203	5 / 73	190
0600	600	5	5,2	585	190	G 1 1/2	487	250	27	203	5 / 73	190
0750	750	5	5,2	585	190	G 2	487	250	27	203	5 / 73	190
1100	1100	6	7,2	765	190	G 2	665	250	103	203	5 / 73	190

* Nominal flow at 7 bar g, m³/h related to 1 bar abs. and 20°C

** without filter element